
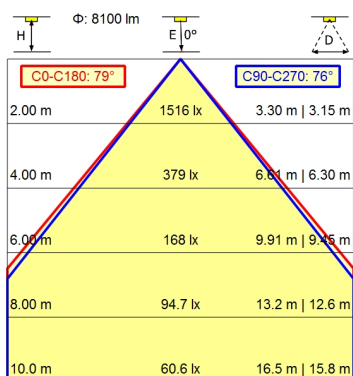
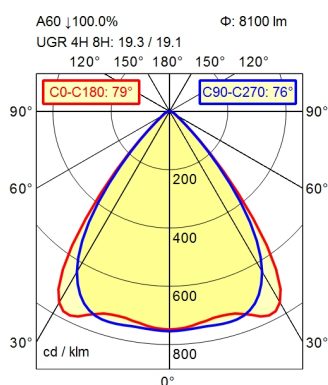




Light source

Work equipment

Connected load

Power consumption

Lens

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Housing

Light source cover

Fastening

Minimum ambient temperature

Maximum ambient temperature

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

LED; IK05

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 47 W

W optics, wide beam

approx. 8.100 lm

approx. 172 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 80

Direct

approx. 100 %

79° / 76°

< 3 SDCM

Optics

$\leq$ 4.400 cd/m²

$\leq$ 22

IP 54; I

Continuously dimmable

Aluminium; Powder coatet; White

Acrylic (PMMA); Satine

Available separately

0 °C

42 °C

L80B50 50.000h

4013330047573

ca. 1,9 kg; 2,1 kg

ca. 1.520 mm; 75 mm; 83 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g