


CEE 7/VII

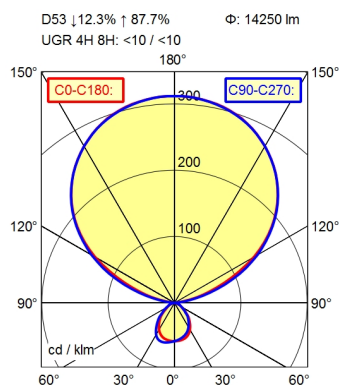

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Mains lead

Fastening

Decorative contrast side parts

Life expectancy LED

Energy efficiency class

EPREL number of lightsources

EAN

Weight without/incl. packaging

Special features

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 200 W

ca. 0,5 W

env. 0,966

approx. 28.500 lm

approx. 142 lm/W

direct static white; indirectly dynamic white

approx. 3.000 - 6.500 K

CRI ≥ 80

Direct/indirect; approx. 12 %

Prism aperture

≤ 3.000 cd/m²

≤ 16

IP 20; I

Presence and daylight sensor control (PIR)

Multi-function switch; Touch-LED

Steel/plastic; Painted; Silver metallic

Acrylic (PMMA); Satine

Steel tube; Painted; Tubular section upright; Silver metallic

C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

Flint grey

L80B50 60.000h

C; D

1951837; 1964660

4013330138677

ca. 27,6 kg

Integrated light and presence sensor PIR;
Separated, direct and indirect light individually
adjustable; Retrofittable with TALK module; Flicker-
free; Direct light component with edge light and
light-guide technology for homogenous light exit;
Integrated light management for biodynamic light
VTL; Luminaire head detachable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g