



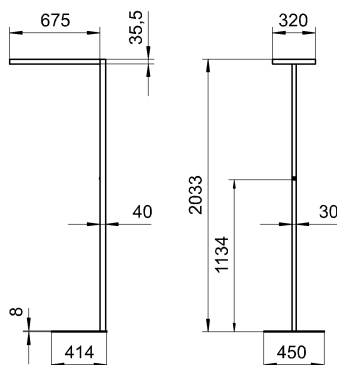

CEE 7/VII

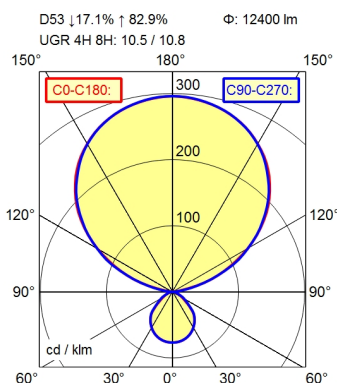

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Mains lead

Fastening

Decorative contrast side parts

Life expectancy LED

Energy efficiency class

EPREL number of lightsources

EAN

Weight without/incl. packaging

Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 85 W

ca. 0,3 W

env. 0,973

approx. 12.400 lm

approx. 145 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 17 %

< 3 SDCM

Prism aperture

≤ 3.000 cd/m²

≤ 16

IP 20; I

Presence and daylight sensor control (PIR)

Rocker switch

Steel/plastic; Painted; Silver metallic

Polycarbonate (PC); Clear

Steel tube; Painted; Tubular section upright; Silver metallic
C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

Metallic silver

L80B50 50.000h

C

887117

4013330143077

ca. 14,7 kg; 17,6 kg

Integrated light and presence sensor PIR; Flicker-free; Motion sensor time-out of 15mins~; Luminaire head detachable; Direct and indirect light switchable together

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear