
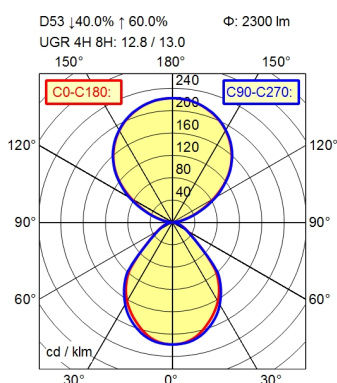


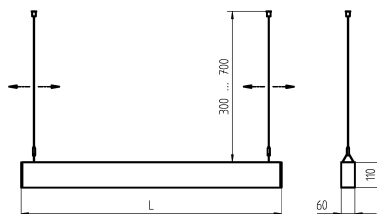

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Dimming Range

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EAN

Weight without/incl. packaging

Dimensions (dimensional drawing)

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 23 W

ca. 0,25 W

env. 0,970

approx. 2.300 lm

approx. 100 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 40

Continuously dimmable

External

Sectional aluminium; Silver

Acrylic (PMMA); Clear

3-100%

ca. 2 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

L90B50 50.000h

C

4013330039042

ca. 3,4 kg; 4,4 kg

L=854mm

ca. 1.000 mm; 190 mm; 120 mm

Flicker-free; DALI Load 1x; Suitable as emergency lighting; External control required for Dali Device type 8; Constant colour temperature over the whole dimming range; Constant luminous flux between 2700 and 6500 K; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear