
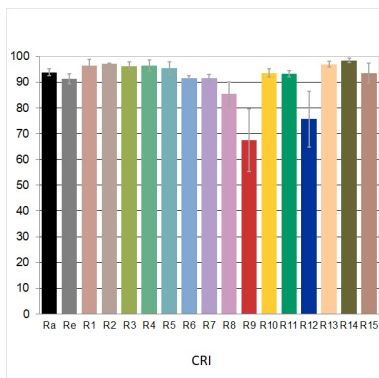
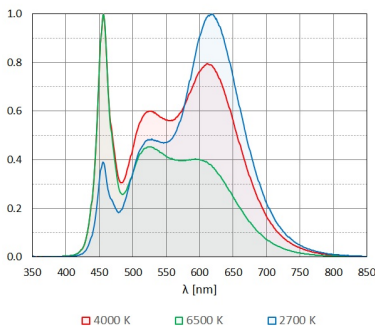


5 pin

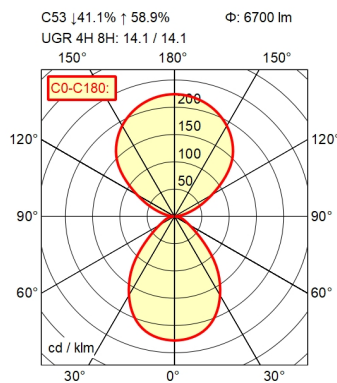

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Fastening

Maximum ambient temperature

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Power supply unit

220 - 240 V; 50 Hz; 60 Hz

ca. 61 W

approx. 6.700 lm

approx. 109 lm/W

adjustable white

approx. 2.700 - 6.500 K

CRI ≥ 90; R9 ≥ 50

Direct/indirect; approx. 40 %

optical film

≤ 2.800 cd/m²

≤ 16

IP 20; I

DALI

External

White

Acrylic (PMMA); Satine

Direct power supply; 5 pin

Ceiling mounted

25 °C

4013330151980

ca. 4,9 kg; 6 kg

ca. 585 mm; 475 mm; 175 mm

Separated, direct and indirect light individually

adjustable; External control device required for

DALI Device Type 6; Biodynamic light VTL;

Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g