
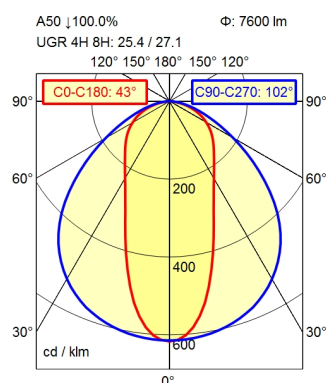




Light source

Work equipment

Connected load

Power consumption

Lens

Luminous flux

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Housing

Light source cover

Fastening

Minimum ambient temperature

Maximum ambient temperature

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

LED; IK06

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 55 W

xN optics, extra narrow beam

approx. 7.600 lm

Cold white

approx. 4.000 K

CRI $\geq$ 80

Direct

approx. 100 %

43° / 102°

< 3 SDCM

Optics

$\leq$ 25.900 cd/m²

$\leq$ 28

IP 54; I

Continuously dimmable

Aluminium; Powder coatet; White

Acrylic (PMMA); Satine

Available separately

-25 °C

45 °C

L80B50 50.000h

4013330007638

ca. 1,9 kg; 2,1 kg

ca. 1.520 mm; 75 mm; 83 mm