
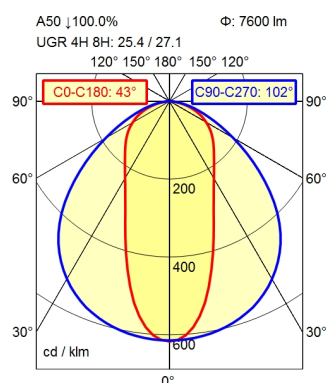




|                                       |                                 |
|---------------------------------------|---------------------------------|
| <b>Light source</b>                   | LED; IK06                       |
| <b>Work equipment</b>                 | Electronic ballast              |
| <b>Connected load</b>                 | 220 - 240 V; 50 Hz; 60 Hz       |
| <b>Power consumption</b>              | ca. 55 W                        |
| <b>Lens</b>                           | xN optics, extra narrow beam    |
| <b>Luminous flux</b>                  | approx. 7.600 lm                |
| <b>Light type/-color</b>              | Cold white                      |
| <b>Colour temperatur</b>              | approx. 4.000 K                 |
| <b>Color rendering index</b>          | CRI $\geq$ 80                   |
| <b>Light distribution</b>             | Direct                          |
| <b>Direct ratio</b>                   | approx. 100 %                   |
| <b>Beam angle</b>                     | 43° / 102°                      |
| <b>Chromaticity tolerance LED</b>     | < 3 SDCM                        |
| <b>Glare control</b>                  | Optics                          |
| <b>Luminance (L65)</b>                | $\leq$ 25.900 cd/m <sup>2</sup> |
| <b>UGR class (4H 8H; EN 12464-1)</b>  | $\leq$ 28                       |
| <b>System of protection/Class</b>     | IP 54; I                        |
| <b>Technology</b>                     | Switchable                      |
| <b>Housing</b>                        | Aluminium; Powder coatet; White |
| <b>Light source cover</b>             | Acrylic (PMMA); Satine          |
| <b>Fastening</b>                      | Available separately            |
| <b>Minimum ambient temperature</b>    | -25 °C                          |
| <b>Maximum ambient temperature</b>    | 47 °C                           |
| <b>Life expectancy LED</b>            | L80B50 50.000h                  |
| <b>EAN</b>                            | 4013330008642                   |
| <b>Weight without/incl. packaging</b> | ca. 1,9 kg; 2,1 kg              |
| <b>Packaging dimensions</b>           | ca. 1.520 mm; 75 mm; 83 mm      |