
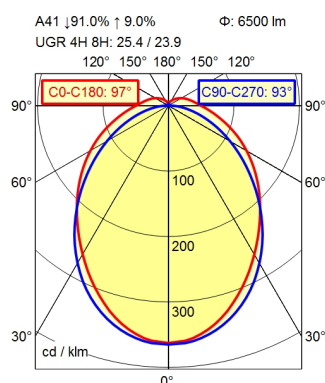




Light source

Work equipment

Connected load

Power consumption

Lens

Luminous flux

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Beam angle

Chromaticity tolerance LED

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Housing

Light source cover

Fastening

Minimum ambient temperature

Maximum ambient temperature

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED; IK04

Adjustable electronic ballast, digital DALI

220 - 240 V; 50 Hz; 60 Hz

ca. 51 W

Cover; diffuse

approx. 6.500 lm

adjustable light colors

approx. 2.700 - 6.500 K

CRI ≥ 80

Direct

approx. 91 %

97° / 93°

< 3 SDCM

≤ 13.200 cd/m²

≤ 28

IP 40; I

Continuously dimmable

Aluminium; Powder coatet; White

Acrylic (PMMA); Satine

Available separately

-25 °C

43 °C

L80B50 50.000h

4013330020231

ca. 1,9 kg; 2,1 kg

ca. 1.520 mm; 75 mm; 83 mm

External control required for Dali Device type 8;
Constant colour temperature over the whole
dimming range; Constant luminous flux between
2700 and 6500 K; Specified values at approx. 4000 K