
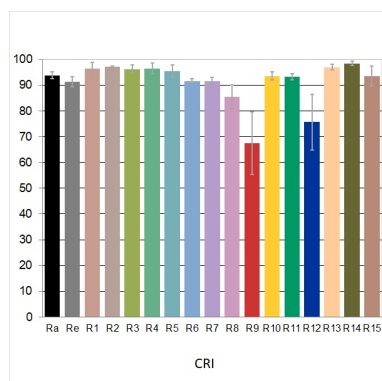
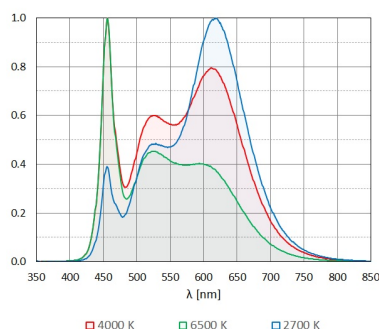
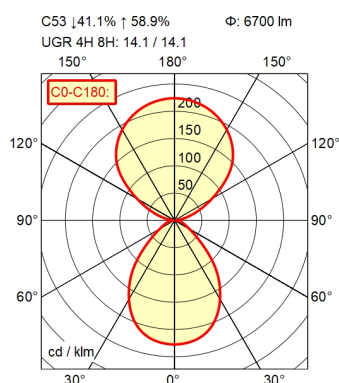




Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Glare control

UGR class (4H 8H; EN 12464-1)

System of protection

Class of protection

Technology

Operation

Emergency lighting

Housing

Light source cover

Mains lead

Fastening

Weight incl. packaging

Packaging dimensions

Power supply unit

220 - 240 V; 50 Hz; 60 Hz

ca. 50 W

approx. 3.000 LM

approx. 60 lm/W

adjustable white

approx. 2.700 - 5.700 K

CRI ≥ 96; R9 ≥ 90

Direct

approx. 100 %

optical film

≤ 16

IP 20

I

DALI

External

none

White

Acrylic (PMMA); Satine

Direct power supply

Ceiling mounted

ca. 6 kg

ca. 585; 475; 175

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g