


GB 1002-1996(3P/10A)

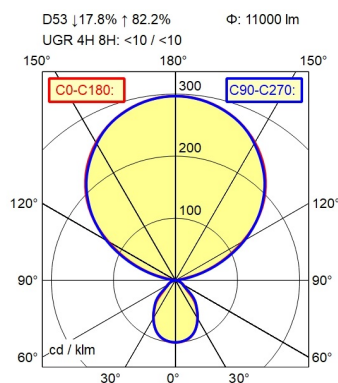

light source
work equipment
connected load
power consumption
power factor
luminous flux
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
glare control
unified glare rating (4H 8H)
class of protection
technology
operation
housing
Light source cover
arm
luminaire base
weight (net)
mains lead
fastening
decorative contrast side parts
special features

LED
 electronic ballast
 220 - 240 V; AC; 50 Hz; 60 Hz
 ca. 100 W
 env. 0,98
 approx. 11.000 LM
 cold white
 approx. 4.000 K
 CRI ≥ 95;
 direct/indirect
 approx. 17 %
 conical prismatic screen
 ≤ 13
 I
 continuously dimmable; Touch DIM
 rocker switch
 steel/plastic; painted; white
 Polycarbonate (PC)
 tubular section upright; white
 C-form flat
 ca. 18,2 kg
 ca. 3 m; mains plug; GB 1002-1996;GB 2099.1-1996
 (3P/10A)
 floor standing base
 flint grey
 light forming; luminaire head detachable