



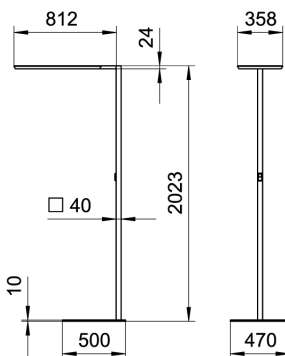

CEE 7/VII

D43 ↓ 13.0% ↑ 87.0%



**Light source**  
**Work equipment**  
**Connected load**  
**Power consumption**  
**Standby**  
**Power factor**  
**Luminous flux**  
**Luminous efficiency <sup>1)</sup>**  
**Light type/-color**  
**Colour temperatur**  
**Color rendering index**  
**Light distribution**  
**Chromaticity tolerance LED**  
**Glare control**  
**Luminance (L65)**  
**UGR class (4H 8H; EN 12464-1)**  
**System of protection/Class**  
**Technology**  
**Operation**  
**Housing**  
**Light source cover**  
**Arm**  
**Luminaire base**  
**Mains lead**  
**Fastening**  
**Life expectancy LED**  
**Energy efficiency class**  
**EPREL number of lightsources**  
**EAN**  
**Weight without/incl. packaging**  
**Special features**

LED  
Electronic ballast DALI  
220 - 240 V; AC; 50 Hz; 60 Hz  
ca. 99 W; 107 W  
ca. 0,5 W  
env. 0,966  
approx. 14.000 lm  
approx. 141 lm/W  
Cold white  
approx. 4.000 K  
CRI ≥ 80  
Direct/indirect; approx. 13 %  
< 3 SDCM  
Prism aperture  
≤ 2.600 cd/m<sup>2</sup>  
≤ 16  
IP 20; I  
Presence and daylight sensor control (PIR)  
Wireless switch  
Aluminium/plastic; Powder coatet; White  
Acrylic (PMMA); Structured; Satine  
Steel tube; Powder-coated; Tubular section  
upright; White  
C-form flat  
ca. 3 m; Mains plug; CEE 7/VII  
Floor standing base  
L80B50 60.000h  
D; D  
1974823; 1974843; 1974875  
4013330056193  
ca. 18 kg; 22,3 kg  
Asymmetric radiation; Flicker-free; App control;  
Direct and indirect lighting component with edge  
light and light guide technology for a  
homogeneous light exit; PIR movement and  
daylight sensor; Magnetic control panel, freely  
positionable

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g