



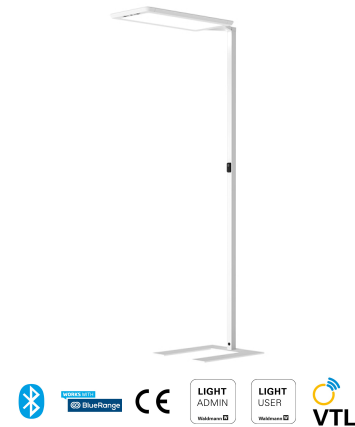

CEE 7/VII

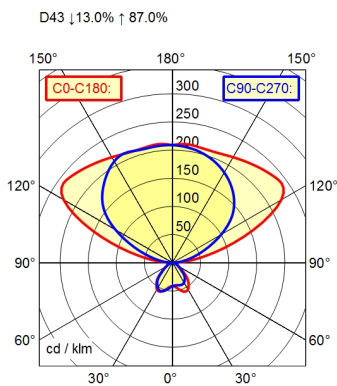

Light source
Work equipment
Connected load
Power consumption
Standby
Power factor
Luminous flux
Luminous efficiency ¹⁾
Light type/-color
Colour temperatur
Color rendering index
Light distribution
Chromaticity tolerance LED
Glare control
Luminance (L65)
UGR class (4H 8H; EN 12464-1)
System of protection/Class
Technology
Operation
Housing
Light source cover
Arm
Luminaire base
Mains lead
Fastening
Life expectancy LED
Energy efficiency class
EPREL number of lightsources
EAN
Weight without/incl. packaging
Special features

LED
Electronic ballast DALI
220 - 240 V; AC; 50 Hz; 60 Hz
ca. 107 W; 107 W
ca. 0,5 W
env. 0,966
approx. 15.000 lm
approx. 140 lm/W
dynamic white; Warm white; Daylight
approx. 2.700 - 6.500 K
CRI ≥ 80
Direct/indirect; approx. 13 %
< 3 SDCM
Prism aperture
≤ 2.700 cd/m²
≤ 16
IP 20; I
Multiple daylight-dependent motion sensors
Wireless switch
Aluminium/plastic; Powder coatet; White
Acrylic (PMMA); Structured; Satine
Steel tube; Powder-coated; Tubular section
upright; White
C-form flat
ca. 3 m; Mains plug; CEE 7/VII
Floor standing base
L80B50 60.000h
D; D
1974823; 1974843; 1974875
4013330061197
ca. 18 kg; 22,3 kg
Asymmetric radiation; Flicker-free; App control;
Optional LTX Cloud connection; Direct and indirect
lighting component with edge light and light
guide technology for a homogeneous light exit;
LTX multisensor for workplace optimisation; TALK
Bluetooth; Biodynamic light VTL; Magnetic control
panel, freely positionable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g