



Free-standing luminaire YARA.doubleT YTS 2/15000/VTL/RX/WS/CEE/S0/R

114268000-00808483

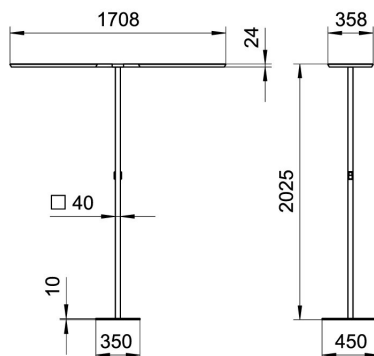

CEE 7/VII

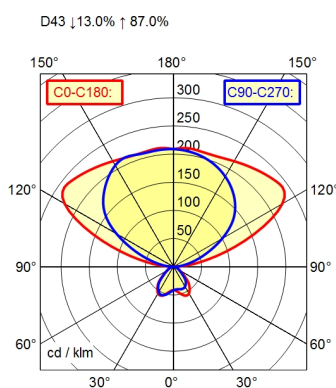

Light source

Work equipment

Connected load

Power consumption

Power factor

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H) ¹⁾

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Weight (net)

Mains lead

Fastening

Dimensions

Life expectancy LED

Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 210 W; 214 W

env. 0,966

approx. 30.000 lm

approx. 142 lm/W

dynamic white; Warm white; Daylight

approx. 2.700 K; 6.500 K

CRI ≥ 80

Direct/indirect

approx. 13 %

< 3 SDCM

005

≤ 2.700 cd/m²

≤ 16

IP 20

I

Multiple daylight-dependent motion sensors; DALI;

Touch DIM

Wireless switch

Aluminium/plastic; Powder coatet; White

Acrylic (PMMA); Structured; Satine

Steel tube; Powder-coated; Tubular section

upright; White

Rectangular flat

ca. 24 kg

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

2.024 mm

L80B50 60.000h

Asymmetric radiation; Flicker-free; App control;
Optional LTX Cloud connection; Direct and indirect
lighting component with edge light and light
guide technology for a homogeneous light exit;
LTX multisensor for workplace optimisation; TALK
Bluetooth; Biodynamic light VTL; Magnetic control
panel, freely positionable

¹⁾ according to DIN EN 12464-1:2021