
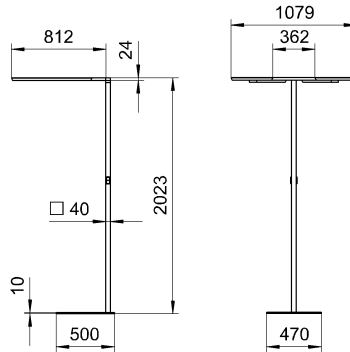



Free-standing luminaire YARA.doubleU YUS 2/8000/840/RX/WS/CEE/S0/C

114268000-00812869

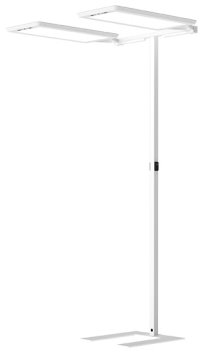

CEE 7/VII

D43 ↓13.0% ↑87.0%



Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Luminaire base

Mains lead

Fastening

Life expectancy LED

Energy efficiency class

EPREL number of lightsources

EAN

Weight without/incl. packaging

Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 111 W; 214 W

ca. 0,5 W

env. 0,966

approx. 16.000 lm

approx. 144 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 13 %

< 3 SDCM

Prism aperture

≤ 1.500 cd/m²

≤ 16

IP 20; I

Multiple daylight-dependent motion sensors

Wireless switch

Aluminium/plastic; Powder coatet; White

Acrylic (PMMA)

Steel tube; Powder-coated; Tubular section
upright; White
C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

L80B50 60.000h

D; D

1974823; 1974843; 1974875

4013330143787

ca. 26 kg; 30,3 kg

Asymmetric radiation; Flicker-free; App control;
Optional LTX Cloud connection; Direct and indirect
lighting component with edge light and light
guide technology for a homogeneous light exit;
LTX multisensor for workplace optimisation; TALK
Bluetooth; Magnetic control panel, freely
positionable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g