

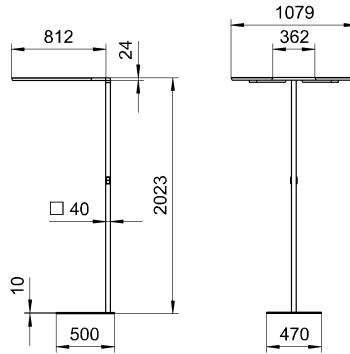


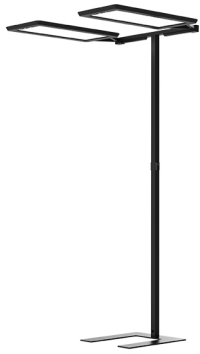

CEE 7/VII

D43 ↓13.0% ↑87.0%



#### Light source

#### Work equipment

#### Connected load

#### Power consumption

#### Standby

#### Power factor

#### Luminous flux

#### Luminous efficiency <sup>1)</sup>

#### Light type/-color

#### Colour temperatur

#### Color rendering index

#### Light distribution

#### Chromaticity tolerance LED

#### Glare control

#### Luminance (L65)

#### UGR class (4H 8H; EN 12464-1)

#### System of protection/Class

#### Technology

#### Operation

#### Housing

#### Light source cover

#### Arm

#### Luminaire base

#### Mains lead

#### Fastening

#### Life expectancy LED

#### Energy efficiency class

#### EPREL number of lightsources

#### EAN

#### Weight without/incl. packaging

#### Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 210 W; 214 W

ca. 0,5 W

env. 0,966

approx. 30.000 lm

approx. 142 lm/W

dynamic white; Warm white; Cold white; Daylight

approx. 2.700 - 6.500 K

CRI ≥ 80

Direct/indirect; approx. 13 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m<sup>2</sup>

≤ 16

IP 20; I

Multiple daylight-dependent motion sensors

Wireless switch

Aluminium/plastic; Powder coatet; Black

Acrylic (PMMA)

Steel tube; Powder-coated; Tubular section  
upright; Black  
C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

L80B50 60.000h

D; D

1974823; 1974843; 1974875

4013330141370

ca. 26 kg; 30,3 kg

Asymmetric radiation; Flicker-free; App control;  
Optional LTX Cloud connection; Direct and indirect  
lighting component with edge light and light  
guide technology for a homogeneous light exit;  
LTX multisensor for workplace optimisation; TALK  
Bluetooth; Biodynamic light VTL; Magnetic control  
panel, freely positionable

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g