


# Free-standing luminaire LAVIGO

DPS 14000/840/D/G2

121798000-00803270


**Waldmann** **W**

ENGINEERS OF LIGHT

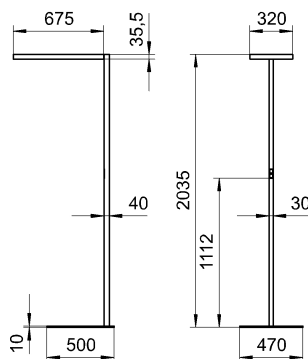

CEE 7/VII

D53 | 12.5% ↑ 87.5%      Φ: 14050 lm  
UGR 4H 8H: <10 / <10



**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Standby**

**Power factor**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**UGR class (4H 8H; EN 12464-1)**

**System of protection/Class**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Arm**

**Luminaire base**

**Mains lead**

**Fastening**

**Decorative contrast side parts**

**Life expectancy LED**

**Energy efficiency class**

**EPREL number of lightsources**

**EAN**

**Weight without/incl. packaging**

**Special features**

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 93 W

ca. 0,5 W

env. 0,943

approx. 14.050 lm

approx. 151 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 13 %

< 3 SDCM

Prism aperture

≤ 3.000 cd/m<sup>2</sup>

≤ 16

IP 20; I

Continuously dimmable

Multi-function switch

Steel/plastic; Painted; Silver metallic

Acrylic (PMMA); Satine

Steel tube; Painted; Tubular section upright; Silver metallic

C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

Flint grey

L80B50 60.000h

C; D

1951837; 887125

4013330017415

ca. 19,7 kg

Separated, direct and indirect light individually adjustable; Flicker-free; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear