




A50 100.0% Φ : 600 lm

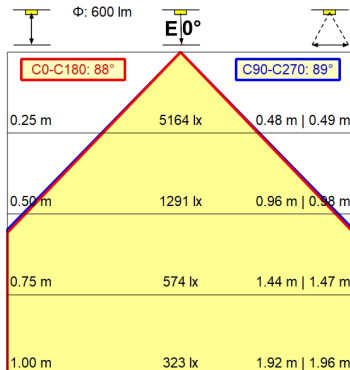

60 x 60 cm Φ : 600 lm
Em: 830 lx
Emax: 1257 lx
Emin: 430 lx
= 50 cm



Light source

Work equipment

Connected load

Secondary tension

Power consumption

Sec. power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Mains lead

Fastening

Energy efficiency class

EPREL number of lightsources

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Electronic plug-in transformer

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

ca. 7 W

ca. 6 W

approx. 600 lm

approx. 100 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 90; R9 $\geq$ 50

Direct; Symmetric; approx. 100 %

< 3 SDCM

Reflector

IP 20; II with plug-in power supply, III without plug-in power supply

Continuously dimmable

Push button

Aluminium; Painted; Black

Clear; Plastic

Jet black

ca. 3 m; Mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P

Adaptor (accessory); Tap16; Table base (accessory); Table clamp (accessory)

D

1347098

4013330064624

ca. 0,8 kg; 1,6 kg

ca. 710 mm; 300 mm; 105 mm

Automatic switchoff adjustable; Behaviour at net recovery adjustable; Push button in luminaire head

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

