



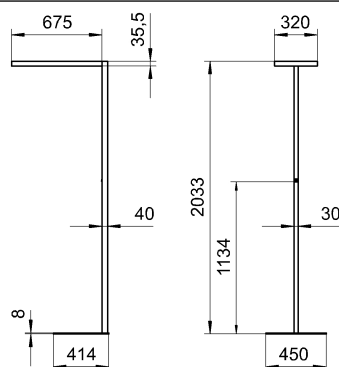

CEE 7/VII

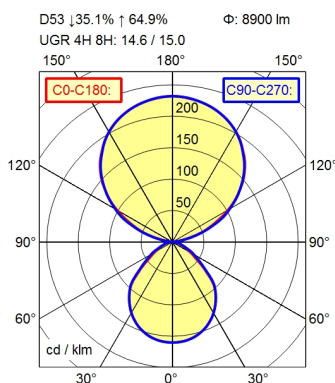

#### Light source

#### Work equipment

#### Connected load

#### Power consumption

#### Standby

#### Power factor

#### Luminous flux

#### Luminous efficiency <sup>1)</sup>

#### Light type/-color

#### Colour temperatur

#### Color rendering index

#### Light distribution

#### Chromaticity tolerance LED

#### Glare control

#### Luminance (L65)

#### UGR class (4H 8H; EN 12464-1)

#### System of protection/Class

#### Technology

#### Operation

#### Housing

#### Light source cover

#### Arm

#### Luminaire base

#### Mains lead

#### Fastening

#### Decorative contrast side parts

#### Life expectancy LED

#### Energy efficiency class

#### EPREL number of lightsources

#### EAN

#### Weight without/incl. packaging

#### Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 62 W

ca. 0,3 W

env. 0,959

approx. 8.900 lm

approx. 143 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 35 %

< 3 SDCM

Prism aperture

≤ 4.400 cd/m<sup>2</sup>

≤ 16

IP 20; I

Presence and daylight sensor control (PIR)

Rocker switch

Steel/plastic; Painted; Silver metallic

Polycarbonate (PC); Clear

Steel tube; Painted; Tubular section upright; Silver metallic  
C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

Metallic silver

L80B50 50.000h

C

887117

4013330143138

ca. 14,7 kg; 17,6 kg

Integrated light and presence sensor PIR; Flicker-free; Motion sensor time-out of 15mins~; Luminaire head detachable; Direct and indirect light switchable together

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear