




A50 100.0% Φ : 600 lm

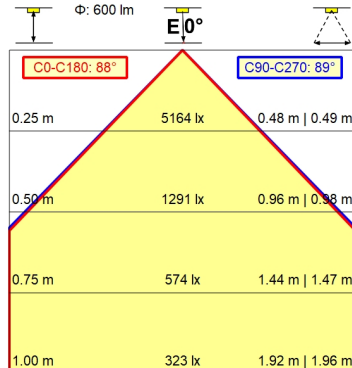

60 x 60 cm Φ : 600 lm
Em: 830 lx
Emax: 1257 lx
Emin: 430 lx
= 50 cm



Light source
Work equipment
Connected load
Secondary tension
Power consumption
Sec. power consumption
Luminous flux
Luminous efficiency¹⁾
Light type/color
Colour temperatur
Color rendering index
Light distribution
Beam angle
Chromaticity tolerance LED
Glare control
System of protection/Class

Technology
Operation
Housing
Light source cover
Arm
Mains lead
Fastening
Energy efficiency class
EPREL number of lightsources
EAN
Weight without/incl. packaging
Packaging dimensions
Special features

LED
Electronic plug-in transformer
100 - 240 V; AC; 50 Hz; 60 Hz
24 V
ca. 7 W
ca. 6 W
approx. 600 lm
approx. 100 lm/W
Cold white
approx. 4.000 K
CRI $\geq$ 90; R9 $\geq$ 50
Direct; Symmetric; approx. 100 %
90°
< 3 SDCM
Reflector
IP 20; II with plug-in power supply, III without plug-in power supply
Continuously dimmable
Push button
Aluminium; Painted; White
Clear; Plastic
White
ca. 3 m; Mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P
Adaptor (accessory); Tap16; Table base (accessory); Table clamp (accessory)
D
1347098
4013330063115
ca. 1 kg; 1,7 kg
ca. 710 mm; 300 mm; 105 mm
Automatic switchoff adjustable; Behaviour at net recovery adjustable; Push button in luminaire head

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

