




Desk-mounted luminaire YARA.single
YAT 15000/VTL/R/SR/CEE/S0/
114268000-00811305

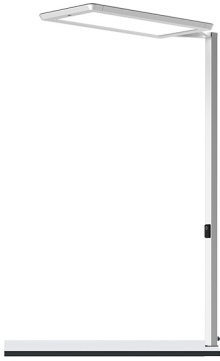

CEE 7/VII

D43 ↓13.0% ↑87.0%



Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Mains lead

Fastening

Minimum ambient temperature

Maximum ambient temperature

Life expectancy LED

Energy efficiency class

EPREL number of lightsources

EAN

Weight without/incl. packaging

Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 107 W; 107 W

ca. 0,5 W

env. 0,966

approx. 15.000 lm

approx. 140 lm/W

dynamic white; Warm white; Daylight

approx. 2.700 - 6.500 K

CRI ≥ 80

Direct/indirect; approx. 13 %

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 16

IP 20; I

Presence and daylight sensor control (PIR)

Wireless switch

Aluminium/plastic; Powder coatet; Silver metallic

Acrylic (PMMA); Structured; Satine

Steel tube; Powder-coated; Tubular section

upright; Silver metallic

ca. 3 m; Mains plug; CEE 7/VII

Socket; Table adaptor

25 °C

25 °C

L80B50 60.000h

D; D

1974823; 1974843; 1974875

4013330133542

ca. 7,7 kg; 12 kg

Asymmetric radiation; Flicker-free; App control;
Direct and indirect lighting component with edge
light and light guide technology for a
homogeneous light exit; PIR movement and
daylight sensor; TALK Bluetooth; Biodynamic light
VTL; Magnetic control panel, freely positionable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g