


CEE 7/VII

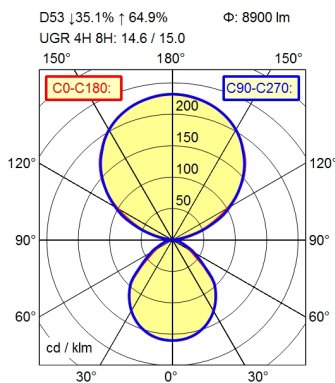

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Mains lead

Fastening

Maximum ambient temperature

Decorative contrast side parts

Life expectancy LED

Energy efficiency class

EPREL number of lightsources

EAN

Weight without/incl. packaging

Special features

LED

Electronic ballast DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 62 W

ca. 0,3 W

env. 0,959

approx. 8.900 lm

approx. 143 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect; approx. 35 %

< 3 SDCM

Prism aperture

≤ 4.400 cd/m²

≤ 16

IP 20; I

Presence and daylight sensor control (PIR)

Rocker switch

Steel/plastic; Painted; Silver metallic

Polycarbonate (PC); Clear

Steel tube; Painted; Tubular section upright; Silver metallic

ca. 3,7 m; Mains plug; CEE 7/VII

Socket; Table adaptor

25 °C

Metallic silver

L80B50 50.000h

C

887117

4013330143237

ca. 8,3 kg

Integrated light and presence sensor PIR; Flicker-free; Motion sensor time-out of 15mins~; Luminaire head detachable; Direct and indirect light switchable together

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear