
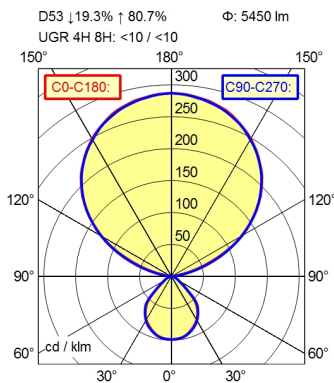


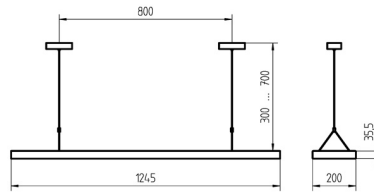

Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Fastening

Minimum ambient temperature

Maximum ambient temperature

Decorative contrast side parts

DALI control

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 42 W

ca. 0,98 W

env. 0,980

approx. 5.450 lm

approx. 129 lm/W

dynamic white; Warm white; Daylight

approx. 3.000 - 6.500 K

CRI ≥ 80; R9 ≥ 10

Direct/indirect; approx. 19 %

< 3 SDCM

optical film; Prism aperture

≤ 1.200 cd/m²

≤ 16

IP 20; I

Continuously dimmable

External

Steel/plastic; Painted; Silver metallic

Polycarbonate (PC); Clear

ca. 1 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

25 °C

25 °C

Flint grey

DT8 | Color Control DT8

4013330079543

ca. 8 kg; 8,7 kg

ca. 1.385 mm; 300 mm; 137 mm

Light forming; Separated, direct and indirect light individually adjustable; Integration into DALI light management system for biodynamic light VTL; DALI Load 2x; DALI - dimming via digital rotary dimmer; Specified values at approx. 4000 K

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g