
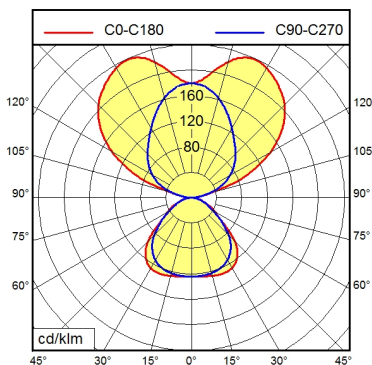
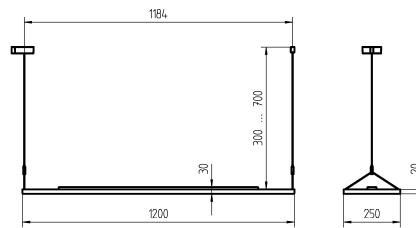


Suspended luminaire IDOO.pendant IPP 7000/VTL/D

113266000-00688771



Light source

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Fastening

Energy efficiency class

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 65 W

ca. 0,5 W

env. 0,980

approx. 8.400 lm

approx. 129 lm/W

Cold white

approx. 2.700 - 6.500 K

CRI ≥ 80

Direct/indirect; approx. 33 %

< 3 SDCM

Prism aperture

≤ 2.800 cd/m²

≤ 16

IP 20

Continuously dimmable

External

Silver

Acrylic (PMMA); Clear

ca. 1 m; With free stranded wires; Single Luminaire

Steel cable 0.3 - 0.7 m

E

4013330081652

ca. 7,8 kg; 8,9 kg

ca. 1.355 mm; 300 mm; 90 mm

Indirect light component with Batwing diffuser for wide-beam light exit; Direct light component with edge light and light-guide technology for homogenous light exit; LED system: DALI Load 1 (2700 K, 49 W, 6100 lm) , DALI Load 2 (6500 K, 49 W, 6500 lm); Specified values when used with NET module

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g