



Wall-mounted luminaire ZERA.bath ZEW 3000/840

114473000-00812052

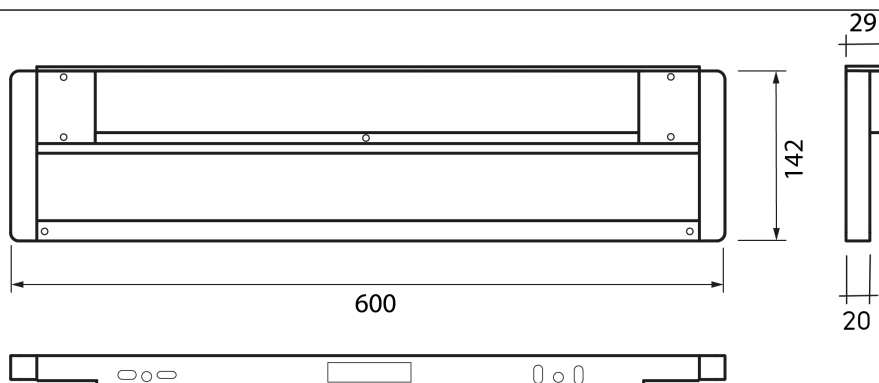

2 pin

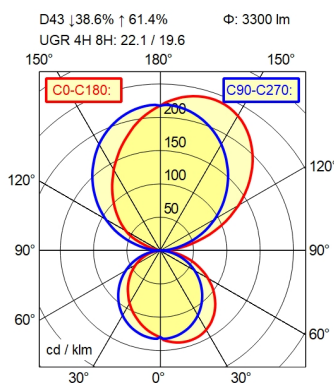

Work equipment	Power supply unit
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 27 W
Luminous flux	approx. 3.300 lm
Luminous efficiency¹⁾	approx. 122 lm/W
Light type/color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; approx. 39 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Diffusor
System of protection/Class	IP 44; I
Technology	Switchable
Operation	External
Housing	Sectional aluminium; Anodised; Aluminium coloured anodised
Light source cover	Acrylic (PMMA); White opal
Mains lead	Connector; 2 pin
Design	mounted version
Fastening	Wall bracket
Maximum ambient temperature	25 °C
Life expectancy LED	L80B50 50.000h
EAN	4013330146122
Weight without/incl. packaging	ca. 1,9 kg; 3,2 kg
Packaging dimensions	ca. 800 mm; 250 mm; 200 mm
Special features	DIN EN 60598-2-25

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g