


5 pin

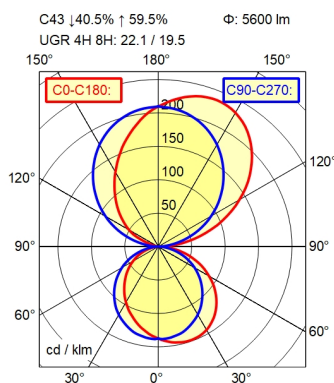

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Chromaticity tolerance LED**

**Glare control**

**System of protection/Class**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Mains lead**

**Design**

**Fastening**

**Maximum ambient temperature**

**Life expectancy LED**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

**Special features**

Electronic ballast dimable digital

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 40 W

approx. 5.600 lm

approx. 140 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 41 %

< 3 SDCM

Diffusor

IP 20; I

Continuously dimmable

External

Sectional aluminium; Anodised; Aluminium

coloured anodised

Acrylic (PMMA); White opal

Connector; 5 pin

mounted version

Wall bracket

25 °C

L80B50 50.000h

4013330146061

ca. 3,3 kg; 4,3 kg

ca. 1.165 mm; 235 mm; 190 mm

DIN EN 60598-2-25; Asymmetric radiation; DALI  
Load 1x; Integration into DALI light management  
systems; Suitable as emergency lighting

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear