



Recessed modular luminaire DOTOO.fit DFE 4000/840

114397000-00808115

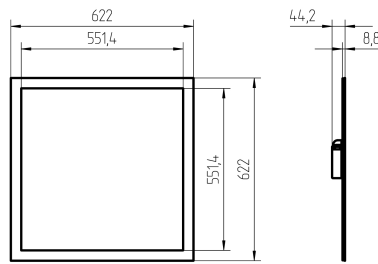

CE

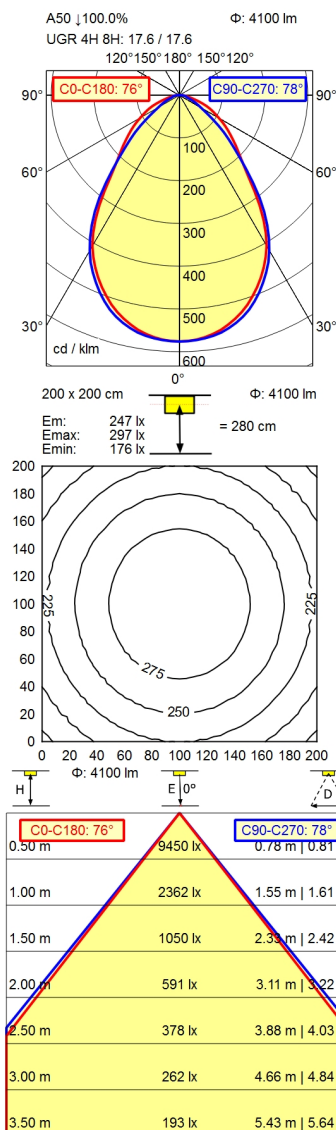

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Mains lead

Design

Installation dimensions

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 30 W

ca. 0,5 W

env. 0,900

approx. 4.100 lm

approx. 136 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

76° / 78°

< 3 SDCM

Prism aperture

≤ 2.700 cd/m²

≤ 19

IP 20; 22; II

Switchable

External

Sectional aluminium; White

ca. 0,5 m; Connector

Integrated version

ca. 625 mm; 625 mm

L80B50 75.000h

4013330052553

ca. 3 kg; 3,7 kg

ca. 695 mm; 685 mm; 85 mm

Flicker-free; Direct light component with edge light and light-guide technology for homogenous light exit; System dimension 625 x 625 mm; Strain relief with the possibility of through-wiring

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear
²⁾ Higher degree of protection when installed.