


5 pin

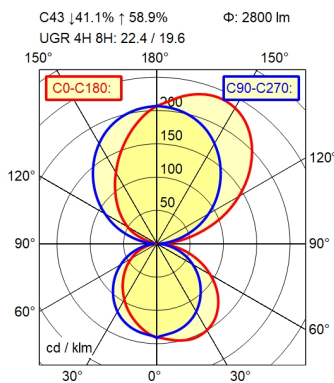

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Maximum ambient temperature

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Electronic ballast dimable digital

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 18 W

approx. 2.800 lm

approx. 155 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 41 %

< 3 SDCM

Diffusor

IP 20; I

Continuously dimmable

External

Sectional aluminium; Anodised; Aluminium

coloured anodised

Acrylic (PMMA); White opal

Connector; 5 pin

mounted version

Wall bracket

25 °C

L80B50 50.000h

4013330146108

ca. 6,9 kg; 3,2 kg

ca. 610 mm; 210 mm; 115 mm

DIN EN 60598-2-25; Asymmetric radiation; DALI
Load 1x; Suitable as emergency lighting

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g