



# Recessed luminaire DOTOO.Spot

## DSE 2000/840

114275000-00806087

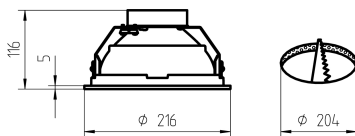

CE

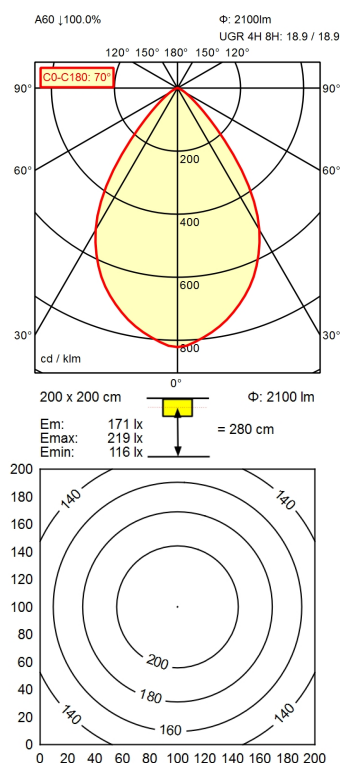

### Light source

### Work equipment

### Connected load

### Power consumption

### Standby

### Power factor

### Luminous flux

### Luminous efficiency <sup>1)</sup>

### Light type/-color

### Colour temperatur

### Color rendering index

### Light distribution

### Beam angle

### Chromaticity tolerance LED

### Glare control

### Luminance (L65)

### UGR class (4H 8H; EN 12464-1)

### System of protection/Class <sup>2)</sup>

### Technology

### Operation

### Housing

### Mains lead

### Design

### Fastening

### EAN

### Weight without/incl. packaging

### Packaging dimensions

### Special features

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 20 W

ca. 0,2 W

env. 0,9

approx. 2.100 lm

approx. 105 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct; approx. 100 %

70°

< 3 SDCM

Prism aperture

≤ 3.300 cd/m<sup>2</sup>

≤ 19

IP 20; 22; II

Switchable

External

Sheet metal; White

ca. 0,35 m; Connector

Integrated version

Tension spring

4013330042059

ca. 0,9 kg; 1,1 kg

ca. 270 mm; 290 mm; 150 mm

Flicker-free; As supplement for room depths and walking areas; Suitable as emergency lighting; Ceiling installation without tools by means of tension springs; Low installation depth thanks to external ballast; Strain relief with the possibility of through-wiring

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear  
<sup>2)</sup> Higher degree of protection when installed.