



# Recessed luminaire DOTOO.Spot DSE 1000/830

114272000-00806084

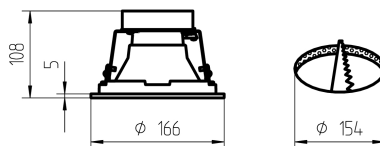

CE

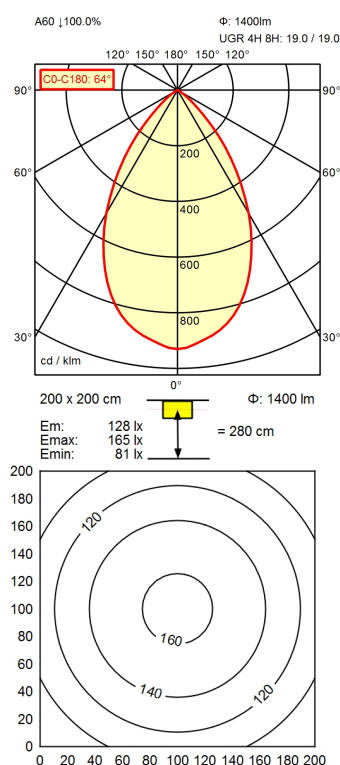

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Standby**

**Power factor**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Beam angle**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**UGR class (4H 8H; EN 12464-1)**

**System of protection/Class <sup>2)</sup>**

**Technology**

**Operation**

**Housing**

**Mains lead**

**Design**

**Fastening**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

**Special features**

LED

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 14 W

ca. 0,2 W

env. 0,9

approx. 1.400 lm

approx. 100 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct; approx. 100 %

64°

< 3 SDCM

Prism aperture

≤ 2.100 cd/m<sup>2</sup>

≤ 19

IP 20; 22; II

Switchable

External

Sheet metal; White

ca. 0,35 m; Connector

Integrated version

Tension spring

4013330041250

ca. 0,7 kg; 0,9 kg

ca. 210 mm; 230 mm; 130 mm

Flicker-free; As supplement for room depths and walking areas; Suitable as emergency lighting; Ceiling installation without tools by means of tension springs; Low installation depth thanks to external ballast; Strain relief with the possibility of through-wiring

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear  
<sup>2)</sup> Higher degree of protection when installed.