
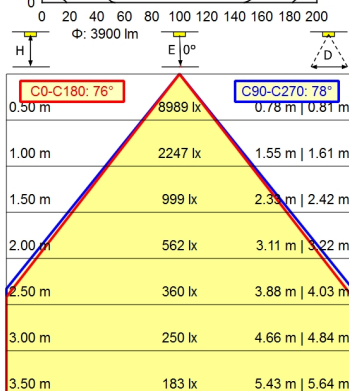


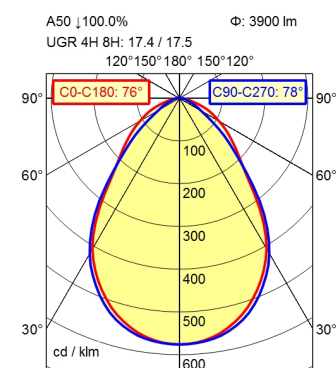


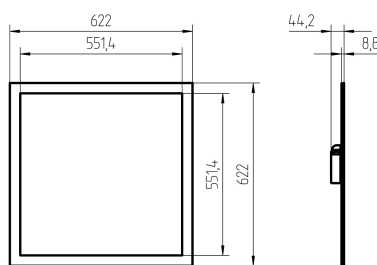

Work equipment

Connected load

Power consumption

Standby

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class ²⁾

Technology

Operation

Housing

Mains lead

Design

Installation dimensions

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Electronic ballast

220 - 240 V; 50 Hz; 60 Hz

ca. 30 W

ca. 0,5 W

env. 0,900

approx. 3.900 lm

approx. 130 lm/W

Warm white

approx. 3.000 K

CRI $\geq$ 80

Direct; approx. 100 %

76° / 78°

< 3 SDCM

Prism aperture

$\leq$ 2.600 cd/m²

$\leq$ 19

IP 20; 22; II

Continuously dimmable

External

Sectional aluminium; White

ca. 0,5 m; Connector

Integrated version

ca. 625 mm; 625 mm

L80B50 75.000h

4013330052874

ca. 3,1 kg; 3,7 kg

ca. 695 mm; 685 mm; 85 mm

Flicker-free; Direct light component with edge light and light-guide technology for homogenous light exit; DALI Load 1x; System dimension 625 x 625 mm; TouchDIM - dimming via standard switch; Strain relief with the possibility of through-wiring

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear
²⁾ Higher degree of protection when installed.