


3 pin

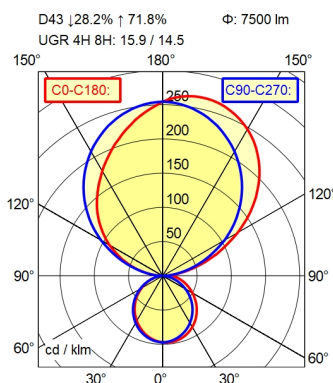

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Minimum ambient temperature

Maximum ambient temperature

Decorative contrast side parts

Life expectancy LED

DALI control

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 71 W

approx. 7.500 lm

approx. 105 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect; approx. 28 %

< 3 SDCM

Diffusor

≤ 16

IP 20; I

Two-stage switchable

External

Sectional aluminium; Anodised; Aluminium
coloured anodised

Acrylic (PMMA); White opal

Connection box; 3 pin

mounted version

Mounting rail

0 °C

30 °C

White

6

DT6 | Color control DT6

4013330145842

ca. 4 kg; 5,8 kg

ca. 1.290 mm; 385 mm; 140 mm

General light, indirect, 3000K, Ra≥80; Reading light,
direct, 3,00K, Ra≥80; General light and night light
DALI; DIN EN 60598-2-25; DALI Load 2x

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g