


RST 20i5 Einbau

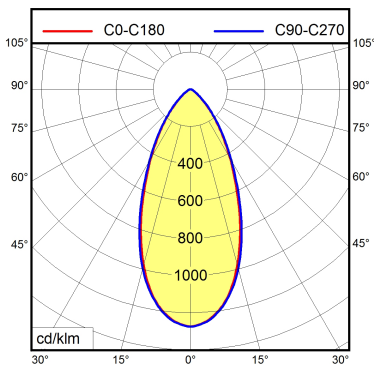

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Power factor**

**Luminous flux**

**Luminous efficiency <sup>1)</sup>**

**Light type/color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Beam angle**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**UGR class (4H 8H; EN 12464-1)**

**System of protection/Class**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Mains lead**

**Design**

**Fastening**

**Accessory**

**Minimum ambient temperature**

**Maximum ambient temperature**

**Decorative contrast side parts**

**Life expectancy LED**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 262 W

env. 0,981

approx. 40.000 lm

approx. 152 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Narrow-beam; Direct; Symmetric; approx. 100 %

48°

< 3 SDCM

Optics

≤ 7.800 cd/m<sup>2</sup>

≤ 22

IP 65; I

Continuously dimmable; DALI

External

Aluminium; Powder coatet; White aluminium

Acrylic (PMMA); Clear

Built-in plug; RST 20i5 Einbau

mounted version

Available separately

Junction box (RST 20i5)

-30 °C

50 °C

Jet black

L80B50 60.000h

4013330049430

ca. 10,8 kg; 13,6 kg

ca. 642 mm; 525 mm; 250 mm

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g