


RST 20i5 Einbau

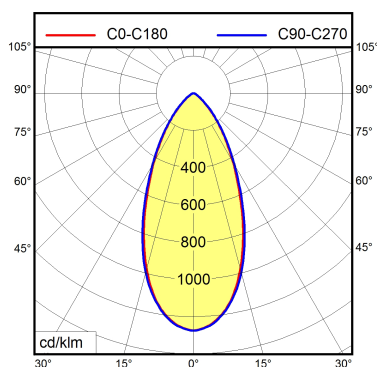

Light source

Work equipment

Connected load

Power consumption

Power factor

Luminous flux

Luminous efficiency ¹⁾

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Design

Fastening

Accessory

Minimum ambient temperature

Maximum ambient temperature

Decorative contrast side parts

Life expectancy LED

EAN

Weight without/incl. packaging

Packaging dimensions

LED

Adjustable electronic ballast, digital DALI

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 262 W

env. 0,981

approx. 40.000 lm

approx. 152 lm/W

Cold white

approx. 5.000 K

CRI ≥ 80

Narrow-beam; Direct; Symmetric; approx. 100 %

48°

< 3 SDCM

Optics

≤ 7.800 cd/m²

≤ 22

IP 65; I

Continuously dimmable; DALI

External

Aluminium; Powder coatet; White aluminium

Acrylic (PMMA); Clear

Built-in plug; RST 20i5 Einbau

mounted version

Available separately

Junction box (RST 20i5)

-30 °C

50 °C

Jet black

L80B50 60.000h

4013330049478

ca. 10,8 kg; 13,6 kg

ca. 642 mm; 525 mm; 250 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g