


RST 20i5 Einbau

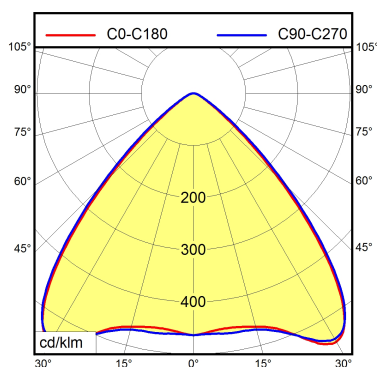

Light source	LED
Work equipment	Adjustable electronic ballast, digital DALI
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 262 W
Power factor	env. 0,981
Luminous flux	approx. 40.000 lm
Luminous efficiency ¹⁾	approx. 152 lm/W
Light type/color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Wide beam; Direct; Symmetric; approx. 100 %
Beam angle	88°
Chromaticity tolerance LED	< 3 SDCM
Glare control	Optics
Luminance (L65)	≤ 8.800 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 25
System of protection/Class	IP 65; I
Technology	Continuously dimmable; DALI
Operation	External
Housing	Aluminium; Powder coatet; White aluminium
Light source cover	Acrylic (PMMA); Clear
Mains lead	Built-in plug; RST 20i5 Einbau
Design	mounted version
Fastening	Available separately
Accessory	Junction box (RST 20i5)
Minimum ambient temperature	-30 °C
Maximum ambient temperature	50 °C
Decorative contrast side parts	Jet black
Life expectancy LED	L80B50 60.000h
EAN	4013330049751
Weight without/incl. packaging	ca. 10,8 kg; 13,6 kg
Packaging dimensions	ca. 642 mm; 525 mm; 250 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g