


RST 25i3 Einbau

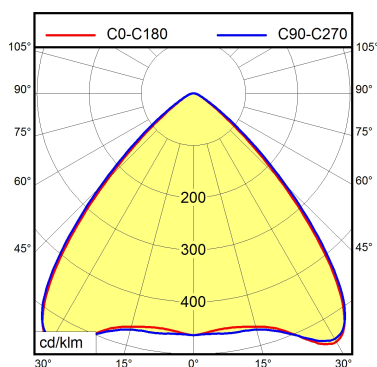

|                                          |                                             |
|------------------------------------------|---------------------------------------------|
| <b>Light source</b>                      | LED                                         |
| <b>Work equipment</b>                    | Electronic ballast                          |
| <b>Connected load</b>                    | 220 - 240 V; AC; 50 Hz; 60 Hz               |
| <b>Power consumption</b>                 | ca. 206 W                                   |
| <b>Power factor</b>                      | env. 0,973                                  |
| <b>Luminous flux</b>                     | approx. 33.000 lm                           |
| <b>Luminous efficiency <sup>1)</sup></b> | approx. 160 lm/W                            |
| <b>Light type/color</b>                  | Cold white                                  |
| <b>Colour temperatur</b>                 | approx. 4.000 K                             |
| <b>Color rendering index</b>             | CRI ≥ 80                                    |
| <b>Light distribution</b>                | Wide beam; Direct; Symmetric; approx. 100 % |
| <b>Beam angle</b>                        | 88°                                         |
| <b>Chromaticity tolerance LED</b>        | < 3 SDCM                                    |
| <b>Glare control</b>                     | Optics                                      |
| <b>Luminance (L65)</b>                   | ≤ 6.800 cd/m <sup>2</sup>                   |
| <b>UGR class (4H 8H; EN 12464-1)</b>     | ≤ 25                                        |
| <b>System of protection/Class</b>        | IP 65; I                                    |
| <b>Technology</b>                        | Switchable                                  |
| <b>Operation</b>                         | External                                    |
| <b>Housing</b>                           | Aluminium; Powder coatet; White aluminium   |
| <b>Light source cover</b>                | Acrylic (PMMA); Clear                       |
| <b>Mains lead</b>                        | Built-in plug; RST 25i3 Einbau              |
| <b>Design</b>                            | mounted version                             |
| <b>Fastening</b>                         | Available separately                        |
| <b>Accessory</b>                         | Junction box (RST 2013)                     |
| <b>Minimum ambient temperature</b>       | -30 °C                                      |
| <b>Maximum ambient temperature</b>       | 50 °C                                       |
| <b>Decorative contrast side parts</b>    | Jet black                                   |
| <b>Life expectancy LED</b>               | L80B50 60.000h                              |
| <b>EAN</b>                               | 4013330109875                               |
| <b>Weight without/incl. packaging</b>    | ca. 10,8 kg; 13,7 kg                        |
| <b>Packaging dimensions</b>              | ca. 642 mm; 525 mm; 250 mm                  |

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g