
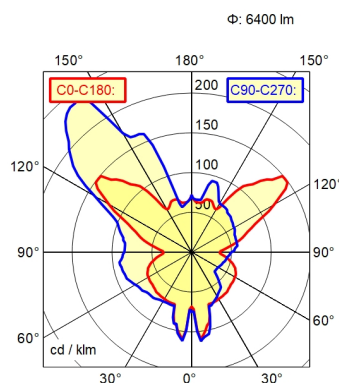


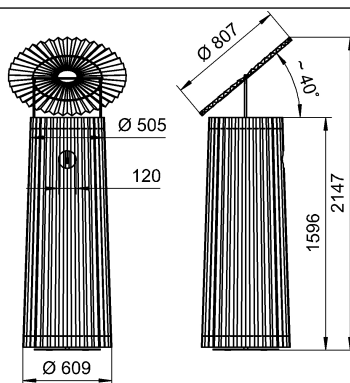

#### Work equipment

#### Connected load

#### Power consumption

#### Luminous flux

#### Luminous efficiency <sup>1)</sup>

#### Light type/-color

#### Colour temperatur

#### Color rendering index

#### Light distribution

#### Chromaticity tolerance LED

#### Glare control

#### System of protection/Class

#### Technology

#### Operation

#### Housing

#### Light source cover

#### Arm

#### Luminaire base

#### Mains lead

#### Fastening

#### Energy efficiency class

#### EAN

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 79 W

approx. 6.400 lm

approx. 81 lm/W

dynamic white; Warm white; Daylight

approx. 2.700 - 6.500 K

CRI ≥ 90

Direct/indirect; approx. 40 %

< 3 SDCM

Diffusor

IP 20; I

Continuously dimmable; DALI

Pull cord

Glass fiber/cellulose; Untreated; Nature

Polycarbonate (PC); Satine

Steel tube; Painted; Tubular section upright; Pure white

Round (flat)

ca. 2,2 m; Mains plug; CEE 7/VII

Floor standing base

C

4013330190910

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g