
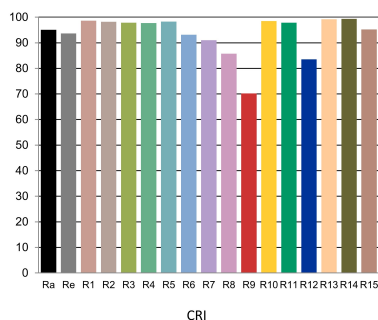
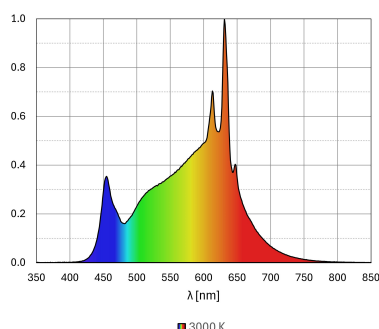
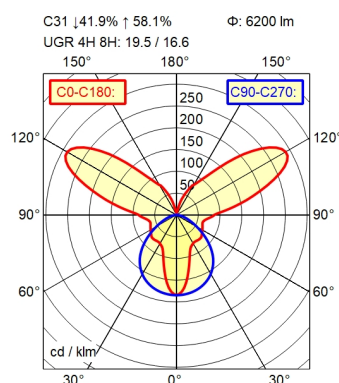


# Ceiling mounted luminaire. VANERA.fit VAA 6000/930

114573000-00816968

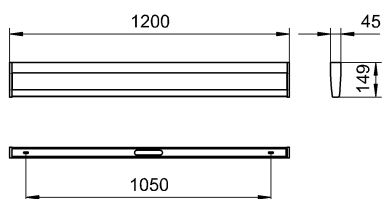

## Work equipment

### Connected load

### Power consumption

### Standby

### Luminous flux

### Luminous efficiency <sup>1)</sup>

### Light type/-color

### Colour temperatur

### Color rendering index

### Light distribution

### Chromaticity tolerance LED

### UGR class (4H 8H; EN 12464-1)

### System of protection/Class

### Technology

### Housing

### Light source cover

### Mains lead

### Design

### Fastening

### Minimum ambient temperature

### Maximum ambient temperature

### Life expectancy LED

### EAN

### Weight without/incl. packaging

### Product compatible with

### Special features

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 46 W

ca. 0,3 W

approx. 6.200 lm

approx. 134 lm/W

Warm white

approx. 3.000 K

CRI ≥ 90; R9 ≥ 50

Direct/indirect

< 3 SDCM

≤ 22

IP 40; I

Switchable

Aluminium; Powder coatet; Traffic white

Acrylic (PMMA); Clear; Structured

Connector

mounted version

Available separately

-10 °C

30 °C

L90B50 50.000h

4013330193133

ca. 3,5 kg

VANERA

Retrofittable; Indirect light component with Batwing diffuser for wide-beam light exit; Suitable as emergency lighting; Maintenance-friendly due to easily accessible ballasts

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g