




Free-standing luminaire YARA.single
YAS 15000/VTL/R/SR/CEE/S0/C
114268000-00808471

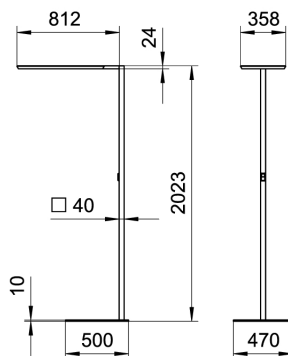

D43 ↓13.0% ↑87.0%

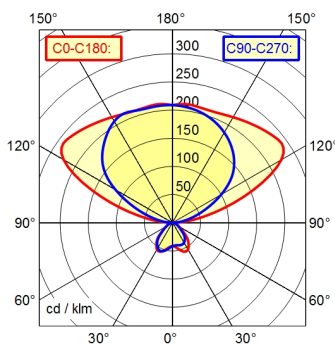

Light source
Work equipment
Connected load
Power consumption
Standby
Power factor
Luminous flux
Luminous efficiency ¹⁾
Light type/-color
Colour temperatur
Color rendering index
Light distribution
Direct ratio
Chromaticity tolerance LED
Glare control
Luminance (L65)
UGR class (4H 8H; EN 12464-1)
System of protection/Class
Technology
Operation
Emergency lighting
Housing
Light source cover
Arm
Luminaire base
Mains lead
Fastening
Life expectancy LED
Energy efficiency class
EAN
Weight without/incl. packaging
Special features

LED
Electronic ballast DALI
220 - 240 V; AC; 50 Hz; 60 Hz
ca. 107 W; 107 W
ca. 0,5 W
env. 0,966
approx. 15.000 lm
approx. 140 lm/W
dynamic white; Warm white; Daylight
approx. 2.700 - 6.500 K
CRI ≥ 80
Direct/indirect
approx. 13 %
< 3 SDCM
Prism aperture
≤ 2.700 cd/m²
≤ 16
IP 20; I
Presence and daylight sensor control (PIR)
Wireless switch
none
Aluminium/plastic; Powder coatet; Silver metallic
Acrylic (PMMA); Structured; Satine
Steel tube; Powder-coated; Tubular section
upright; Silver metallic
C-form flat
ca. 3 m; Mains plug; CEE 7/VII
Floor standing base
L80B50 60.000h
D; D
4013330070267
ca. 18 kg; 22,3 kg
Asymmetric radiation; Flicker-free; App control;
Direct and indirect lighting component with edge
light and light guide technology for a
homogeneous light exit; PIR movement and
daylight sensor; TALK Bluetooth; Biodynamic light
VTL; Magnetic control panel, freely positionable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g