


CEE 7/VII

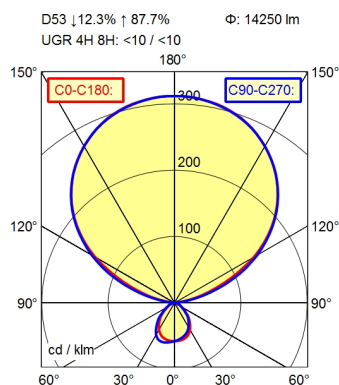

#### Light source

#### Work equipment

#### Connected load

#### Power consumption

#### Standby

#### Power factor

#### Luminous flux

#### Luminous efficiency <sup>1)</sup>

#### Light type/-color

#### Colour temperatur

#### Color rendering index

#### Light distribution

#### Glare control

#### Luminance (L65)

#### UGR class (4H 8H; EN 12464-1)

#### System of protection/Class

#### Technology

#### Operation

#### Housing

#### Light source cover

#### Arm

#### Luminaire base

#### Mains lead

#### Fastening

#### Decorative contrast side parts

#### Life expectancy LED

#### Energy efficiency class

#### EPREL number of lightsources

#### EAN

#### Weight without/incl. packaging

#### Special features

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 200 W

ca. 0,5 W

env. 0,966

approx. 28.500 lm

approx. 142 lm/W

direct static white; indirectly dynamic white

approx. 3.000 - 6.500 K

CRI ≥ 80

Direct/indirect; approx. 12 %

Prism aperture

≤ 3.000 cd/m<sup>2</sup>

≤ 16

IP 20; I

Presence and daylight sensor control (PIR)

Multi-function switch; Touch-LED

Steel/plastic; Painted; White

Acrylic (PMMA); Satine

Steel tube; Painted; Tubular section upright; White

C-form flat

ca. 3 m; Mains plug; CEE 7/VII

Floor standing base

Flint grey

L80B50 60.000h

C; D

1951837; 1964660

4013330138660

ca. 27,6 kg

Integrated light and presence sensor PIR;  
Separated, direct and indirect light individually  
adjustable; Retrofittable with TALK module; Flicker-  
free; Direct light component with edge light and  
light-guide technology for homogenous light exit;  
Integrated light management for biodynamic light  
VTL; Luminaire head detachable

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g